

NX1612SA

For OA / AV / Short-range Wireless

■ Features

- A small and thin surface-mount type crystal unit.
- Ideal for Wearable device and Short-range Wireless module.
- Ultra compact and thin (Typ. 1.6 × 1.2 × 0.3 mm)
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.



Pb Free

RoHS Compliant
Directive 2011/65/EU

■ Specifications

Item	Model	NX1612SA
Main Application		For OA / AV
Nominal Frequency		24 to 80 MHz
Overtone Order		Fundamental
Frequency Tolerance (25 ±3 °C)		±10 × 10 ⁻⁶
Frequency versus Temperature Characteristics (with reference to +25 °C)		±15 × 10 ⁻⁶
Operating Temperature Range		-30 to +85 °C
Storage Temperature Range		-40 to +85 °C
Equivalent Series Resistance		Refer to *1
Level of Drive		10 μW (Max. 200 μW)
Load Capacitance		8 pF

The above specifications are standard for this NDK product.


■ How to Specify an Order

When ordering our products, specify them with an "Ordering Code" that consists of the following :

Model name - Frequency (Max : 9 digits) M - Number for specifying an order Example NX1612SA-24.000M-STD-CIS-1

If you have any queries concerning our standard frequencies and numbers for specifying orders, please contact our sales representatives or visit our homepage (<http://www.ndk.com/>).

■ Dimensions

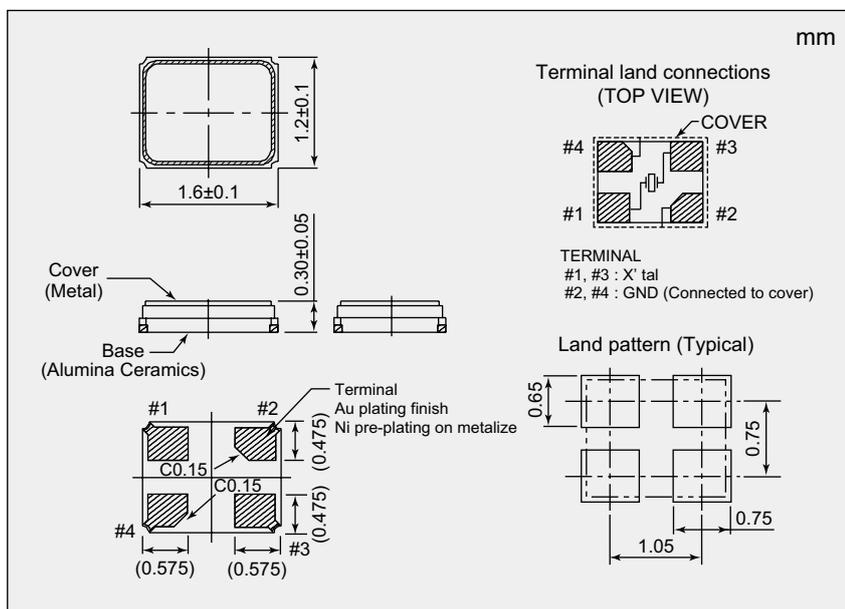

*1 Equivalent Series Resistance

Nominal frequency (MHz)	Equivalent Series Resistance max. [Ω]
24 to 32	150
32 to 38	100
38 to 80	80